


# MODERNUS

## Technical Details

### FIMO

Single-Glazed (1/2" or 3/8")  
Wood-Hinged Door

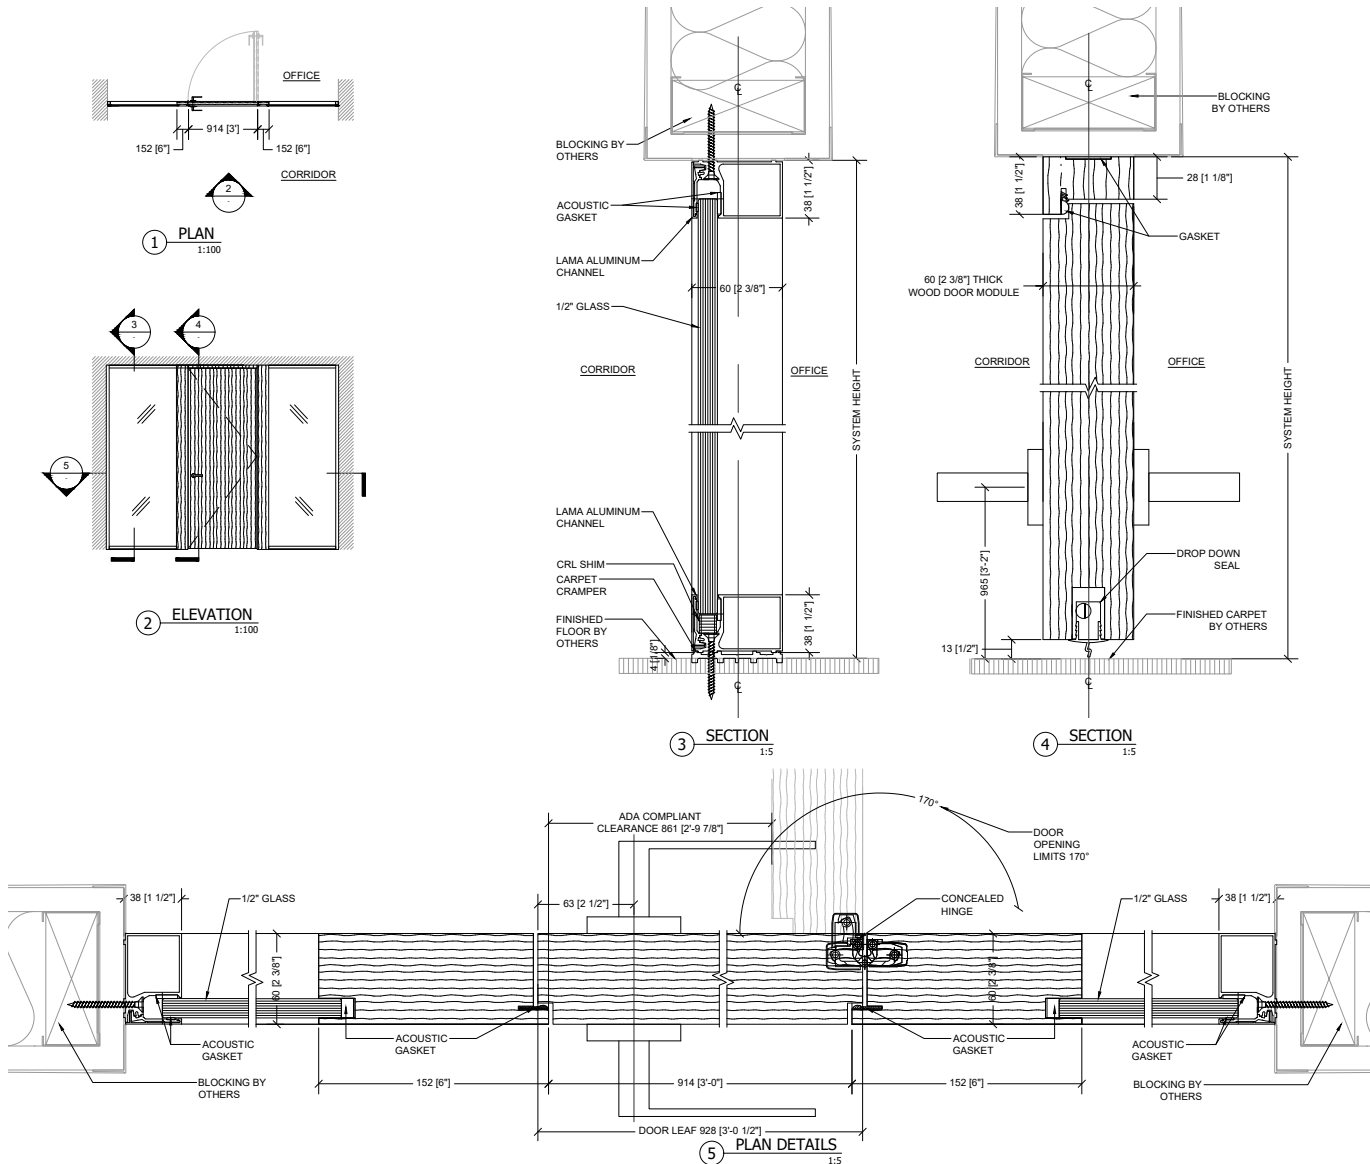

- Max height: 10'
- Max height: 8'-6" for 3/8" glass
- Min. opening to fit only door: 4'-0 1/2"
- Min. opening door + side light: 4'-6 1/2"
- Door opening limit: 170°
- Door jamb min.: 6"
- Door jamb max: 13"
- Blocking required at all locations where Modernus systems meet drywall. See details.

#### GLASS

- Fixed glass: 1/2" or 3/8"

#### HARDWARE OPTIONS

- Levers and mortise locks, locking pull, non-locking pull
- Overhead concealed closer

#### SECURITY HARDWARE

- Electric strike

All dimensions in mm [inches] unless otherwise stated.  
Do not scale from this drawing. This drawing is property of modernus copyright protected.

# MODERNUS

## Technical Details

### FIMO

#### Wood-Hinged Door with Regular Hinges

- Max height: 10'
- Max height: 8'-6" for  $\frac{3}{8}$ " glass
- Min. door opening only: 3'-6 $\frac{1}{2}$ "
- Min. door opening + side light: 4'
- Single-glass panel configuration is not possible
- Blocking required at all locations where Modernus systems meet drywall. See details.


#### GLASS

- Fixed glass:  $\frac{1}{2}$ " or  $\frac{3}{8}$ "

#### HARDWARE OPTIONS

- Levers and mortise lock, locking pull, non-locking pull
- Magnetic catch
- Regular butt hinges or oleodynamic self-closing hinges

All dimensions in mm [inches] unless otherwise stated.  
Do not scale from this drawing. This drawing is property of modernus copyright protected.

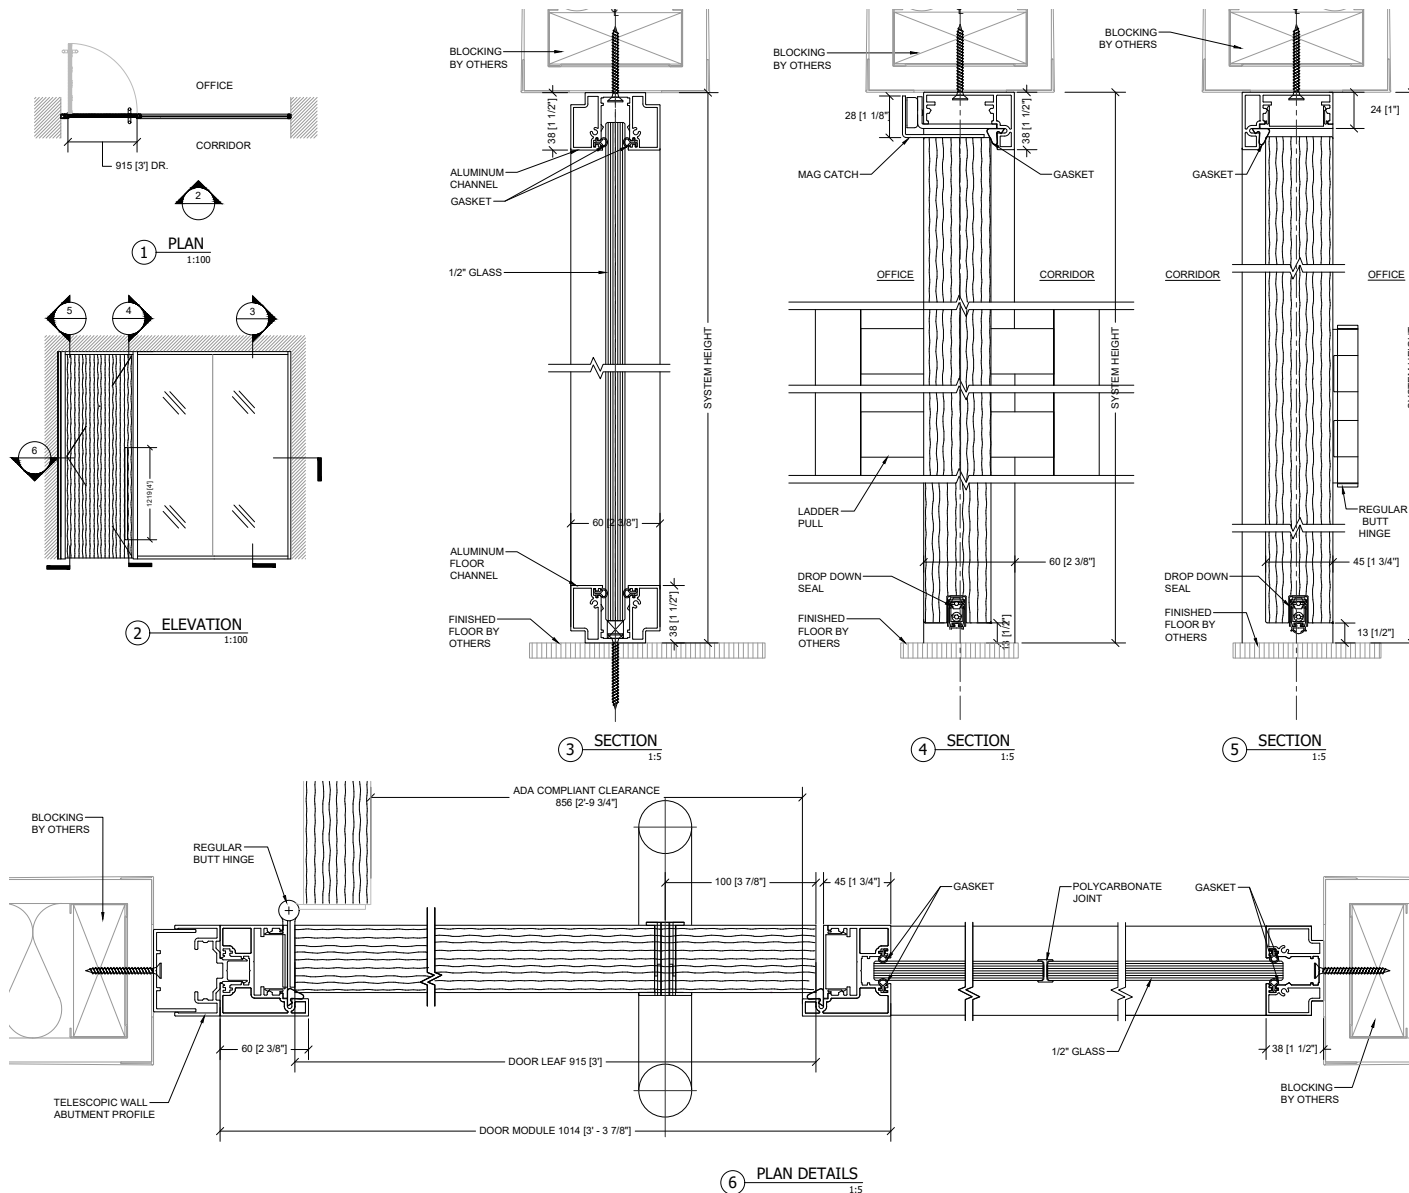


# MODERNUS

## Technical Details

### FIMO

Dual-Glazed ( $\frac{1}{2}$ " or  $\frac{3}{8}$ ")  
Wood-Hinged Door

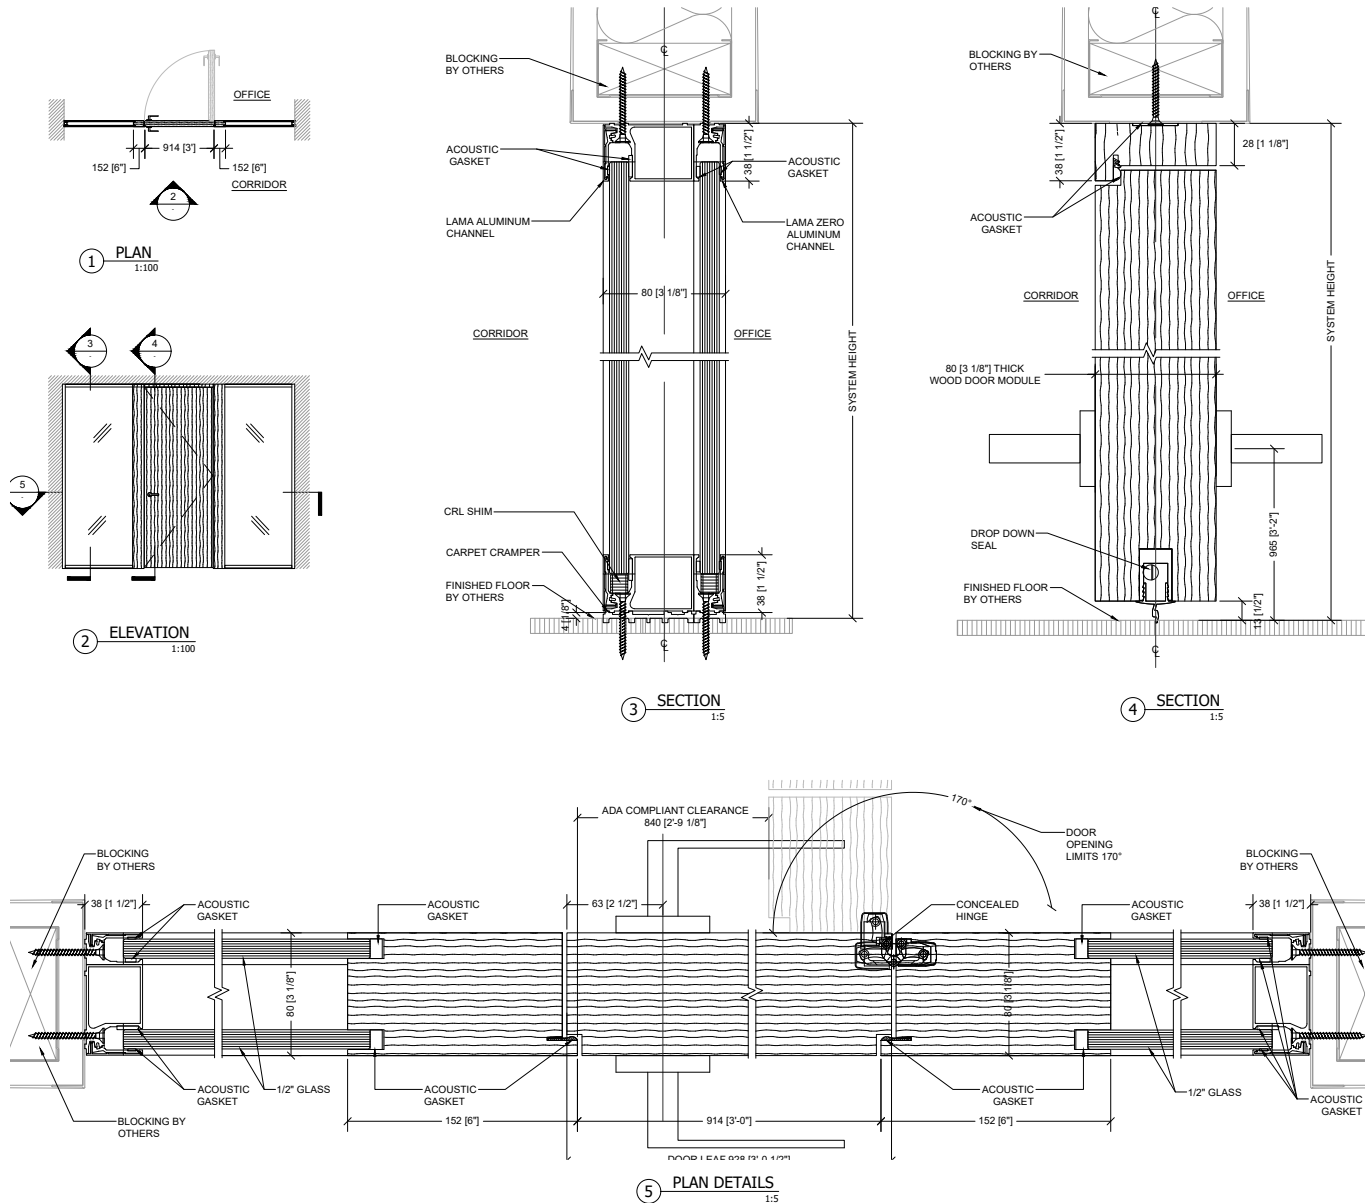

- Max height: 10'
- Max height: 8'-6" for  $\frac{3}{8}$ " glass
- Min. opening to fit only door: 4'-0 $\frac{1}{2}$ "
- Min. opening door + side light: 4'-6 $\frac{1}{2}$ "
- Door opening limit: 170°
- Door jamb min.: 6"
- Door jamb max: 13"
- Blocking required at all locations where Modernus systems meet drywall. See details.

#### GLASS

- Fixed glass:  $\frac{1}{2}$ " or  $\frac{3}{8}$ "

#### HARDWARE OPTIONS


- Levers and mortise locks, locking pull, non-locking pull
- Overhead concealed closer

#### SECURITY HARDWARE

- Electric strike

All dimensions in mm [inches] unless otherwise stated.  
Do not scale from this drawing. This drawing is property of modernus copyright protected.

SINGLE-GLAZED ( $\frac{1}{2}$ " or  $\frac{3}{8}$ ")  
WOOD-HINGED DOOR BACK-TO-BACK CONFIGURATION

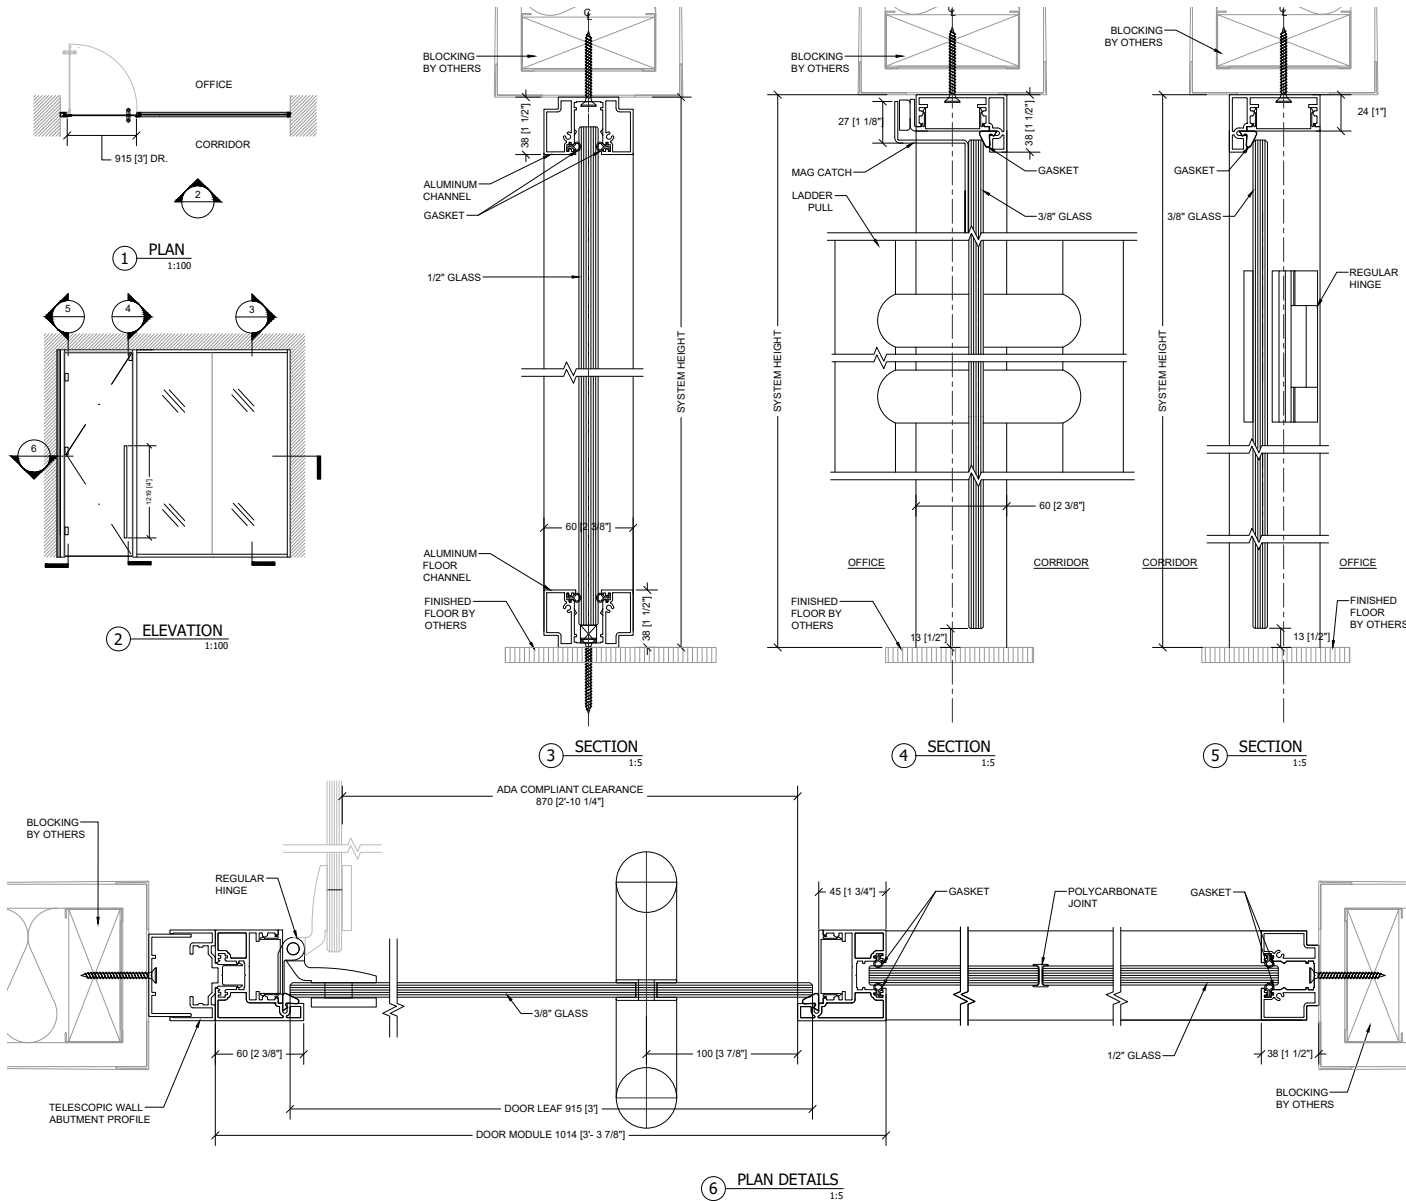

# MODERNUS

## Technical Details

### FIMO

#### Single-Glazed ( $\frac{1}{2}$ " or $\frac{3}{8}$ ") Wood-Hinged Door Back-to-Back Configuration

- Max height: 10'
- Max height: 8'-6" for  $\frac{3}{8}$ " glass
- Min. door opening only: 3'-6 $\frac{1}{2}$ "
- Min. door opening + side light: 4'
- Single-glass panel configuration is not possible.
- Blocking required at all locations where Modernus systems meet drywall. See details.

#### GLASS

- Fixed glass:  $\frac{1}{2}$ " or  $\frac{3}{8}$ "
- Door glass:  $\frac{3}{8}$ ", always tempered

#### HARDWARE OPTIONS

- Levers and mortise lock, locking pull, non-locking pull
- Magnetic catch
- Regular butt hinges or oleodynamic self-closing hinges

All dimensions in mm [inches] unless otherwise stated.  
Do not scale from this drawing. This drawing is property  
of modernus copyright protected.

## FIMO

- Max height: 10'
  - Max height: 8'-6" for  $\frac{3}{8}$ " glass
  - Min. opening to fit only door: 4'-0 $\frac{1}{2}$ "
  - Min. opening door + side light: 4'-6 $\frac{1}{2}$ "
  - Door opening limit: 170°
  - Door jamb min.: 6"
  - Door jamb max: 13"
  - Blocking required at all locations where Modernus systems meet drywall.
- See details.

- Fixed glass:  $\frac{1}{2}$ " or  $\frac{3}{8}$ "


- ## HARDWARE OPTIONS

- Levers and mortise locks, locking pull, non-locking pull
- Overhead concealed closer

## SECURITY HARDWARE

- Electric strike

All dimensions in mm [inches] unless otherwise stated.  
Do not scale from this drawing. This drawing is property  
of modernus copyright protected.

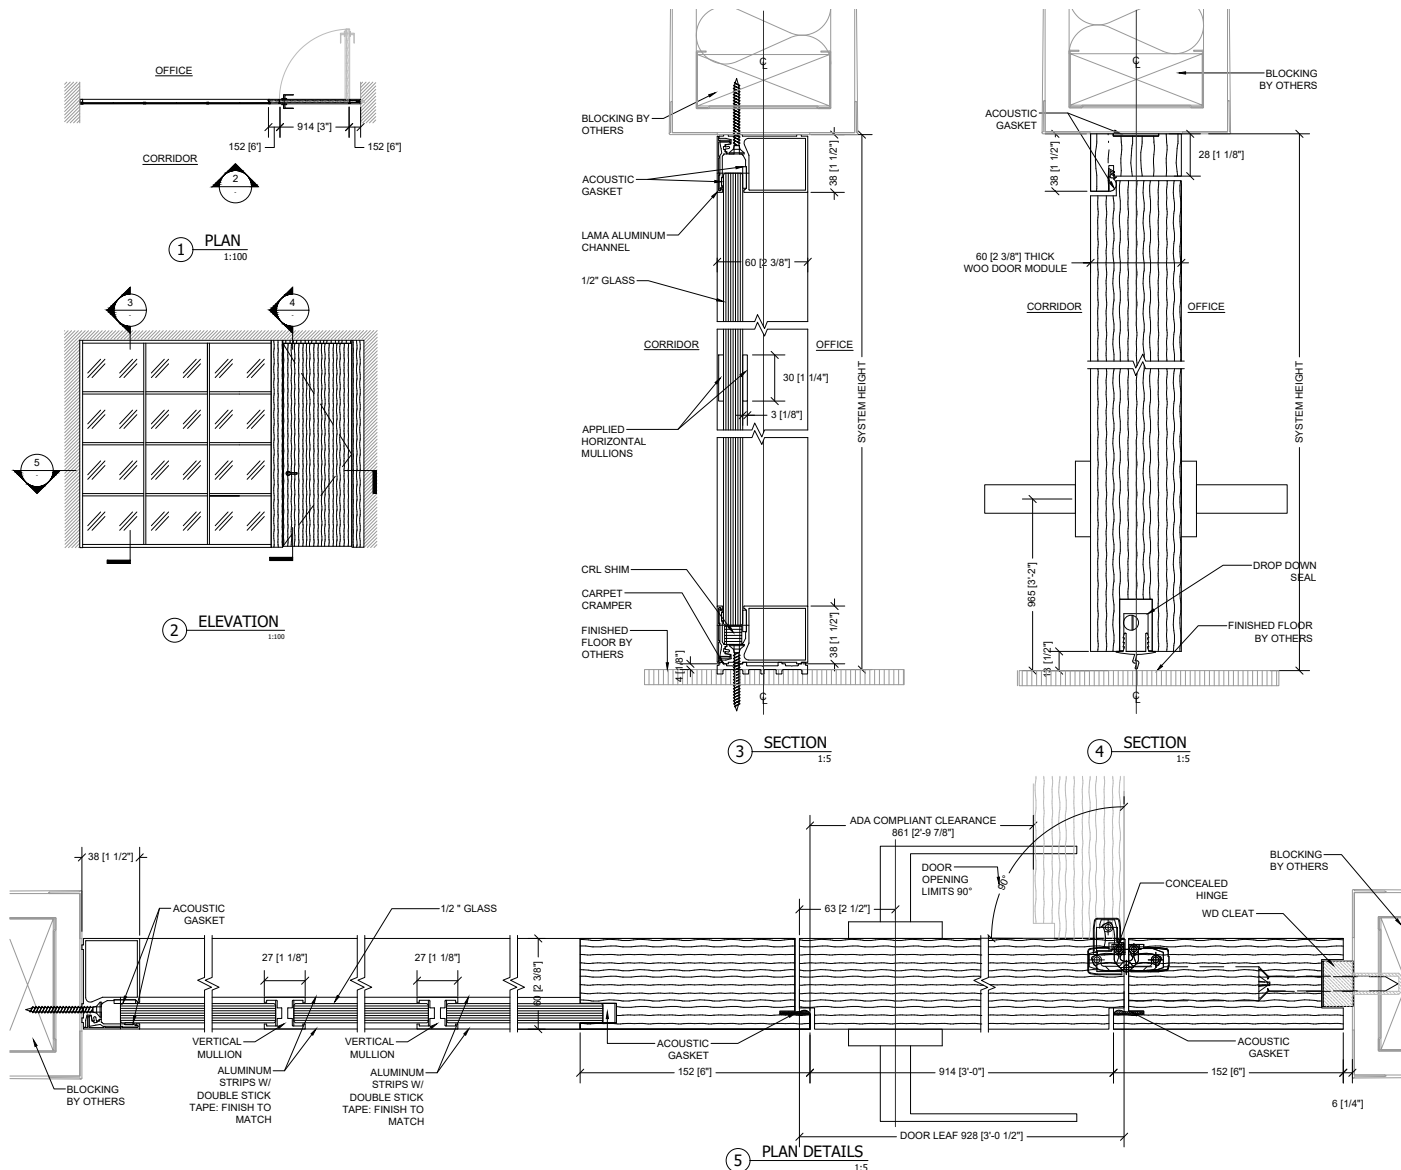

# MODERNUS

## Technical Details

### FIMO

#### Single-Glazed (5/8") Wood-Hinged Door

- Max height: 10'
- Max height: 8'-6" for 3/8" glass
- Min. opening to fit only door: 4'-0 1/2"
- Min. opening door + side light: 4'-6 1/2"
- Door opening limit: 170°
- Door jamb min.: 6"
- Door jamb max: 13"
- Blocking required at all locations where Modernus systems meet drywall. See details.

#### GLASS

- Fixed glass: 5/8" laminated glass (0.06" interlayer)

#### HARDWARE OPTIONS

- Levers and mortise locks, locking pull, non-locking pull
- Overhead concealed closer

#### SECURITY HARDWARE

- Electric strike

All dimensions in mm [inches] unless otherwise stated.  
Do not scale from this drawing. This drawing is property of modernus copyright protected.

